


**Figure 6-5**  
**LEFT EDGELINES FOR DIVIDED HIGHWAYS**


**DETAIL 24**

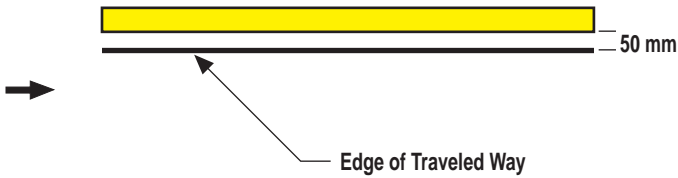

**POLICY**


Left Edgeline pattern for use on streets and highways (normally used on local streets and highways).

**DETAIL 25**

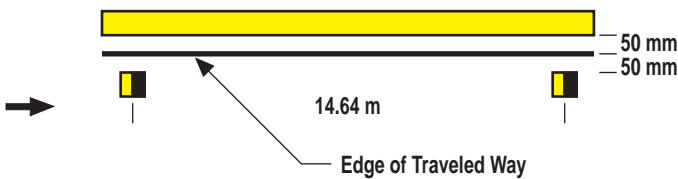


Left Edgeline for use on State highways.

**DETAIL 25A**

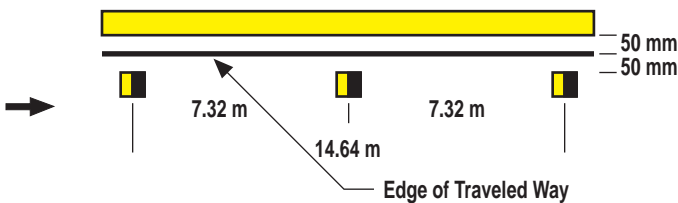


Left Edgeline for use on freeway ramps and connectors.

**DETAIL 26**

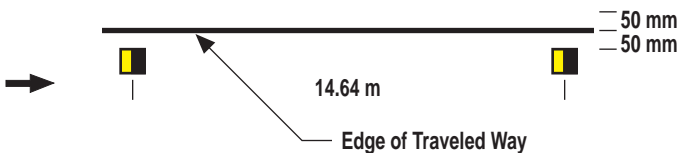

Alternate to Details 24 and 25 when there is adequate contrast between travelled way and shoulder.

**DETAIL 27**

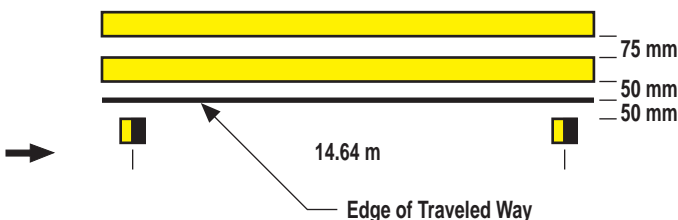

Alternate to Detail 25. A double solid yellow line may be used for more emphasis when motorists tend to use the shoulder for a through lane, or where encroachments onto the shoulder occasionally occur. See Note 1.

**NOTE: 1.** A 75 mm black line shall be place between the 100 mm yellow lines on State highways and may be placed on streets and highways under local jurisdiction.

**LEGEND**

 100 mm Yellow  
 Direction of Travel

 One-Way Yellow Reflective Markers  
NOT TO SCALE